

Submersible Impeller Range

Whale's high flow long life submersible impeller galley pumps

Simple plumbing suitable for 10mm ($\frac{3}{8}$ ") or 13mm ($\frac{1}{2}$ ") flexible hose

Watertight electrics sonic welded cable connection

Simple and compact design



Standard Pump 10 LPM

- Simple, compact and an economical solution
- Ideal for basic, one outlet application




Premium Pump 13 LPM

- Reliable, general purpose and suitable for multiple outlets
- Long life, very quiet with low power consumption
- An inexpensive way to update a manual to an electric system



High Flow Pump 14 LPM

- Market leading submersible pump for flow performance suitable for showering

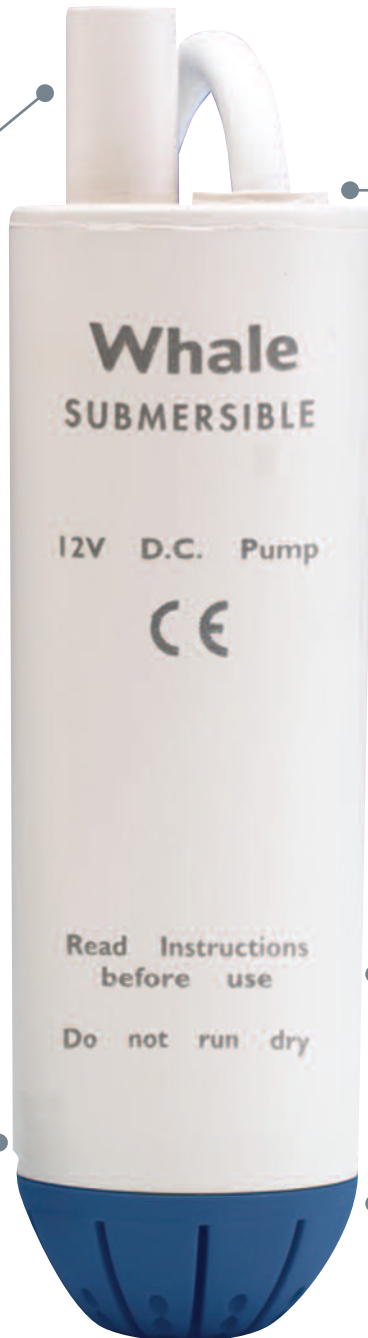

Whale
SUBMERSIBLE

12V D.C. Pump



Read Instructions
before use

Do not run dry

Narrow design ideal to drop into your water tank

Protected strainer prevents debris entering pump*

Robust ABS pump housing

Product code: see table
Please note - Strainer included on High Flow and Premium models only

Simple, Compact Economical Solution

- Long life, very quiet with low power consumption
- An inexpensive way to update a manual to an electric system
- Choose the pump to suit your freshwater needs on board from 3 flow options
- 12 V d.c. / 24 V d.c. models available
- Compact, quiet, lightweight design suitable for use with pressure switch and microswitch systems
- Also suitable for pumping diesel

1 Year Warranty

Awards and Accreditations

- EMC compliant
- CE marked

COMPLETE YOUR SYSTEM

Freshwater system accessories such as water filters, and pipework connections – page 76-77

YOU MAY ALSO LIKE

Whale water filters – page 76

Watermaster Automatic Pressure Pumps – page 54

Whale Quick Connect plumbing - Pipework and fittings – page 90-93



Product Information

Model Specifications

Model	Standard		Premium			High Flow	
	12V d.c.	12V d.c.	12V d.c.	24V d.c.	24V d.c.	12V d.c.	12V d.c.
Pump	Sub	Sub	Inline	Sub	Inline	Sub	Inline
Submersible Pump New Code	GP1002	GP1352	GP1392	GP1354	GP1394	GP1652	GP1692
Submersible Pump Old Code	GP1002	GP8815	GP9955	GP8825	GP9965	GP9216	GP9255
Fuse Size	5 amp automotive			3 amp automotive		5 amp automotive	
Weight	0.15kg (0.3 lbs)						
Hose Connections	Suitable for 10 mm (3/8") or 13 mm (1/2") Flexible Hose						
Connection to Quick Connect Plumbing	Use WX1511B (Stem Adaptor 11 mm-15 mm) Connect WX1504 (15 mm Equal Straight) see page 84-87						
Filter included	No	Yes	No	Yes	No	Yes	No
Materials in contact with liquid	Pump Body: ABS, Seals: Nitrile®, Strainer: Polypropylene, Impeller: PBT, Cable: PVC						

*Note: Pump performance will depend on the plumbing system and restrictions on outlets in your boat.

*Note: New Model codes are direct replacement for pre 2006 model part numbers.

Performance Data


Discharge Head	Flow Rate Per Minute / Current Draw			
	Standard 12V d.c.	12 V d.c.	24V d.c.	High Flow 12V d.c.
0 m (0 ft)	10.3 ltrs 2.4 amps	13.2 ltrs 3.6 amps	13.2 ltrs 1.8 amps	15.8 ltrs 3.8 amp
1 m (3 ft)	8.75 ltrs 2.2 amps	11.75 ltrs 3.3 amps	11.75 ltrs 1.6 amps	14.8 ltrs 3.7 amps
3 m (9 ft)	5.75 ltrs 2.0 amps	9.75 ltrs 2.9 amps	9.75 ltrs 1.45 amps	12.8 ltrs 3.5 amps

Note: Each pump performance will depend on the plumbing system and restrictions on outlets in your boat.

Dimensions Table

	A	B	C	D
Standard	20 mm (3/16")	88 mm (3 7/16")	36 mm (1 7/16")	108 mm (4 1/4")
Premium/High Flow	20 mm (3/16")	109 mm (4 5/16")	36 mm (1 7/16")	129 mm (5 1/16")

Note: These specifications are retail items only. For details of our bulk pack range for boat builders and wholesalers - contact Whale Support.

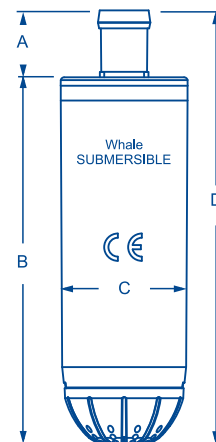

WARNING

Note: Not suitable for petrol, low flash point liquids and aggressive chemicals. This pump must not be used for pumping petrol or any highly inflammable or corrosive liquids.