
## **Dometic**

### Dometic FreshLight 2200

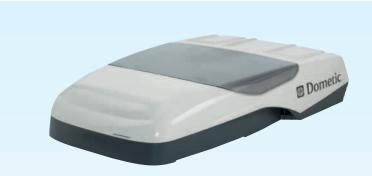

## DOMETIC FRESHLIGHT 2200

# THE UNIQUE COMBINATION OF AN AIR CONDITIONER AND WINDOW

For this innovative air conditioner, there's no need to sacrifice the roof window – quite the contrary. With Dometic FreshLight, the window is already built into the air conditioning unit. The result is perfect temperatures on board a caravan or motorhome with natural light still coming from above.

- → Roof air conditioner with integrated rooflight
- > Energy-efficient heat pump system for cooling and heating
- → Active ventilation system and single-pleated darkening screen
- → Individual air flow distribution with automatic blower control
- → Temperature and blower speed can be conveniently set by remote control
- → Control panel with integrated, dimmable LED lights





### Roof air conditioner T

#### Technical data

Ref. No.	9102900165
Best for vehicle length (m)	max. 7
Cooling capacity (watts/Btu/h)	2200/7500
Heating capacity (watts)	2700 <b>*1</b>
Consumption Cooling/heating mode (watts) heat pump (watts) Input voltage	950/ — 1200 230 volts AC/50 Hz
	200 voite, (6, 60 1)2
Current consumption Cooling/heating mode (A) Heat pump (A)	4.1/— 5.2
Required circuit protection Cooling (A) Heating (A)	5 6
Refrigerant	R407c
Dimensions (W x H x D mm) External Internal	758 x 210 x 1105 550 x 53 x 880
Roof opening (W x D mm)	400 x 700

Roof thickness (mm) 2

Weight (kg)

Air distribution



lumber of air vents 2 (1 each front/re	lumber of air	r vents	2 (1	each	front/	/rea	ır)
--	---------------	---------	------	------	--------	------	-----

•	٠	•	۰	۰	•	•	۰	۰	۰	•	۰	۰	۰	٠	٠	٠	٠	۰	۰	۰	۰	۰	•	۰	۰	ď
- 1	۸.			٠.		e	ы	ч		£			•	_	м			٠.	-							

Number of blower speeds
Remote control

Functions

Night-time control, timer,

Continuous air flow regulation for all air vents

temperature pre-setting (+16°C to +31°C), automatic mode, cooling/heating, lighting on/off, ventilation

TEC 29, TEC 29LPG,

TEC 30EV, TEC 40D,

T 2500H, T 4000H

Test marks e-approved to EMC / automotive directive


Suitable generators

Optional extras:

**⊕ Optional extras:** DC-Kits

Other accessories: Protective cover Ref. No. 9103500237

\*1 Maximum heating capacity = heat pump capacity





DOMETIC WAECO
INTERNATIONAL GMBH
HOLLEFELDSTR. 63
D-48282 EMSDETTEN

TEL: +49 (0) 2572 879-193 FAX: +49 (0) 2572 879-313

MAIL: EX@DOMETIC-WAECO.DE
NET: WWW.DOMETIC-WAECO.COM

